

TZ215

履带式液压挖掘机

CRAWLER HYDRAULIC EXCAVATORS

操作重量
Operating weight
22400 kg

铲斗容量
Bucket capacity
1.0 m³

额定功率
Rated power
129 kw/2000 rpm


排放标准
Emission standard
国IV



地址：山西省综合改革示范区潇河产业园区广安西街115号
Add: No. 115 Guang'an West Street, Xiaohe Industrial Park,
Shanxi Province Comprehensive Reform Demonstration Zone
售后服务热线 (Service): 400-1509-888
www.tz.com.cn


TZ 工作范围 Working Ranges mm

a	最大挖掘高度 Max. digging height	9592
b	最大卸载高度 Max. dumping height	6747
c	最大挖掘深度 Max. digging depth	6551
e	最大垂直挖掘深度 Max. digging depth	5596
f	最大挖掘半径 Max. digging reach on ground	9894
g	最小回转半径 Min. swing radius	3674

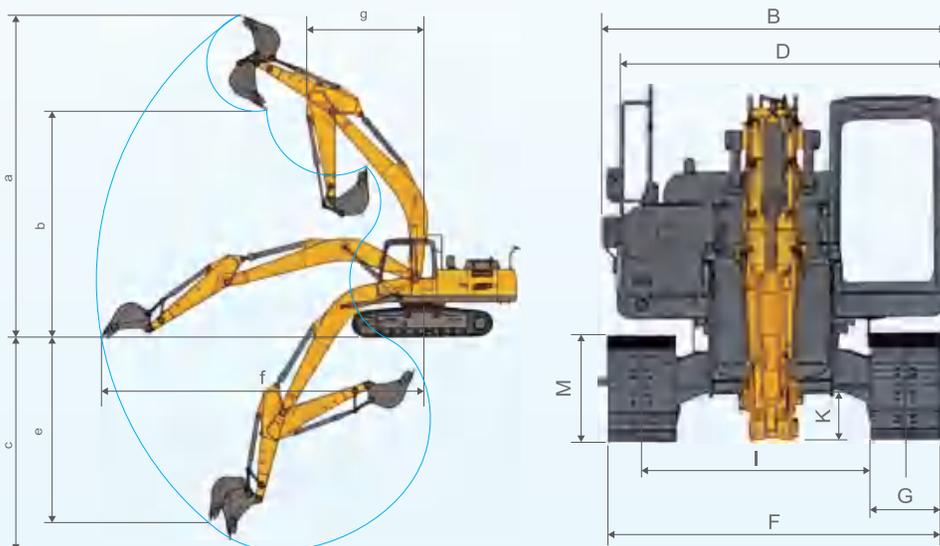

TZ 外形尺寸 Dimensions mm

A	总长 Overall length	9609
B	总宽 Overall width	2800
C	总高 Overall height	3072
D	转台宽度 Overall width of upperstructure	2750
E	履带长度 Track length	4066
F	底盘宽度 Chassis width	2800
G	履带宽度 Track shoe width	600
H	履带轴距 Track length on ground	3260
I	轨距 Track gauge	2200
J	配重离地间隙 Counterweight clearance	1123
K	最小离地间隙 Min. ground clearance	455
L	尾部最小回转半径 Min. tail swing radius	2880
M	履带高度 Track height	950

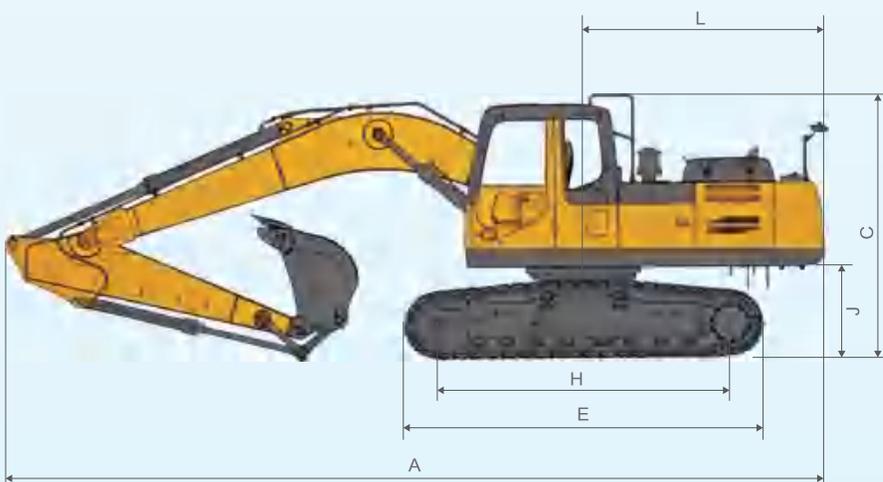

TZ 整机参数 Key Spec

产品型号 Product model	TZ215	
操作重量 Operating weight	kg	22400
铲斗容量 Bucket capacity	m ³	1.0
发动机 Motor		
发动机品牌 Engine Brand	/	康明斯Cummins
直喷 Direct injection	/	✓
4冲程 4-stroke	/	✓
水冷 Water cooled	/	✓
缸数 No. of cylinders	/	6
发动机额定功率 Rated power	kW/rpm	129/2000
排量 Displacement	L	6.7
油类容量 Oil Capacity		
燃油箱容积 Fuel tank	L	380
液压油箱容积 Hydraulic tank	L	260
发动机机油容量 Engine oil	L	35
液压系统 Hydraulic System		
主泵额定流量 Rated flow of main pump	L/min	2x266

主安全阀压力 Pressure-main valve	MPa	34.3
行走系统压力 Pressure-travel system	MPa	34.3
回转系统压力 Pressure-swing system	MPa	25.5
先导系统压力 Pressure-pilot system	MPa	3.9
主要性能 Main Performance		
行走速度 (高/低) Travel speed (high/low)	km/h	5.9/3.3
回转速度 Swing speed	r/min	10.7
爬坡能力 Gradeability	°	35
接地比压 Ground pressure	kPa	47.3
铲斗挖掘力 Bucket digging force	kN	141
斗杆挖掘力 Arm digging force	kN	108
最大牵引力 Max. traction force	kN	210
标配 Standard		
动臂长度 Boom length	mm	5680
斗杆长度 Arm length	mm	2919
铲斗容量 Bucket capacity	m ³	1.0